

we care 

primus

laundry equipment

High Spin Washer Extractors

M 16, M 26, M 33, M 44, M 66



FEATURES

- Freestanding, high spin
- Oversized frame, bearings and drum
- Large drain valve (Ø76 mm - M16)
(2x Ø76 mm - M 26 33 44 66)
- Easy access to all parts
- Frequency controlled motor
- Large door opening for easy loading and unloading.
- Graphitronic® - new graphic display with almost unlimited possibilities as:
 - Communication interface enabling remote service
 - Multilingual microprocessor
 - Freely programmable
- PowerWash® perforated lifting ribs: better washing results, lower water consumption
- SuperEco washing programmes
 - significantly reduces water and electricity consumption

OPTIONS

- Patented soap dispenser with 5 removable compartments
- Stainless steel cabinet
- Liquid soap pumps
- SoftWash® (wet cleaning) version
- Weighing system
- Trace-Tech® traceability software and networking system



HYGIENIC
SOLUTION



EXTRA LARGE
DOOR



EASY OPERATION

POWERWASH

superEco

Graphitronic®


OPTILOAD

TRACE-TECH


TYPE		M 16	M 26	M 33	M 44	M 66
CAPACITY						
Drum capacity	kg/lb	16/36	26/60	33/75	44/100	66/150
Drum volume	l	165	265	332	442	663
Drum diameter	mm	Ø650	Ø650	Ø650	Ø750	2xØ750
Number of drums		1	1	1	1	2
Number of doors		1	1	1	1	2
DRUM SPEED						
Washing speed	rpm	45	45	45	41	41
Highest spin speed	rpm	960	960	960	915	915
G-factor spin speed		335	335	335	350	350
PROGRAMMER						
Graphitronic® microprocessor		standard				
CABINET						
Stainless steel AISI 316L		option				
HEATING						
Electrical	kW	18	24	36	45	54
Steam heating	bar	3-8	3-8	3-8	3-8	3-8
CONNECTIONS						
Electrical		3x200-240V 50/60Hz 3x380-480V 50/60Hz				
Water inlet		1"				
Steam inlet		3/4"				
DIMENSIONS						
Size HxWxD	mm	1600x1410x1060	1600x1410x1060	1600x1560x1060	1650x1610x1170	1650x2160x1170
TRANSPORT DATA						
Gross	kg	1090	1050	1090	1280	1510
Net	kg	990	960	1000	1140	1360
Packed HxWxD	mm	1840x1465x1175	1840x1465x1175	1840x1610x1175	1840x1660x1380	1840x2200x1380
WATER CONSUMPTION						
Cold and hot water per cycle*	l	170 + 42	276 + 69	364 + 91	467 + 117	785 + 195

* Tested in accordance of EN 604 56 norm, The data concerning dimensions of machines include all extended parts

FRONT M 16 26 33 44




SIDE M 16 26 33 44 66




1. Service panel
2. Powder tank
3. Loading door
4. Door handle
5. Display
6. Keyboard
7. Main switch
8. Button to unlock the door
9. Button for the door position
10. Inlet for liquid soap
11. Inlet for warm water
12. Drum ventilation
13. Inlet for hard cold water
14. Inlet for soft cold water
15. Lock service panel
16. Steam supply (version with steam heating)
17. Drain 2x3" (76mm)

BACK M 16 26 33 44



FRONT M 66

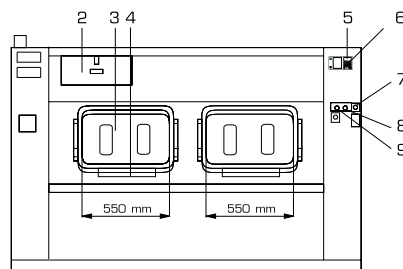

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com