

we care 

primus

laundry equipment

High Spin Industrial Washer Extractors

FS 6, FS 7, FS 10



FEATURES

- Freestanding, high spin
- Front and top panels from stainless steel
- Stainless steel drum and tub
- Standard Easy to use (EC) microprocessor
- Large drain valve (Ø76 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Standard liquid soap connections
- Compact width: 660 mm, ideal for replacing existing models (including models of most competitors)
- Frequency controlled motor
- PowerWash® perforated lifting ribs: more mechanical action, lower water consumption
- SuperEco washing programmes - significantly reduces water and electricity consumption

OPTIONS

- Stainless steel cabinet (AISI 304)
- Graphitronic® - new graphic display with almost unlimited possibilities as:
 - Communication interface enabling remote service
 - Multilingual microprocessor
 - Freely programmable
- Coin operated timer
- Liquid soap pumps
- SoftWash® version (wet cleaning)
- Anti-vandalism fascia panel
- Water recovery kit
- Trace-Tech® traceability software and networking system



LOW WATER AND ENERGY CONSUMPTION



LARGE DRAIN VALVE



SERVICE FRIENDLY

POWERWASH®

supereco


liqui-mix®

TRACE-TECH®


TYPE		FS 6	FS 7	FS 10
CAPACITY				
Drum volume	l	60	73	95
Capacity	kg/lb	6/15	7/18	10/25
Drum diameter	mm	Ø530	Ø530	Ø530
DRUM SPEED				
Wash speed	rpm	48	48	48
Spin speed	rpm	1000	1000	1000
G-factor		300	300	300
PROGRAMMER				
Coin meter (or tokens)			+	
Coin counter			+	
EC microprocessor			standard	
Graphitronic® microprocessor			+	
CABINET				
Coloured panels			standard	
Stainless steel AISI 304			+	
CONNECTION				
Freestanding				
HEATING				
100% hot water	°C	90	90	90
	°F	194	194	194
100% electrical	kW	6-9	6-9-12	6-9-12
Steam additional heating	bar	1-3	1-3	1-3
Steam high pressure	bar	3-8	3-8	3-8
CONNECTION				
Electrical		1×220-240V 50/60Hz 3×220-240V 50/60Hz 3×380-415V+N 50/60Hz Others on request		
Water inlet	inch	3/4"		
Steam inlet	inch	1/2"		
DIMENSIONS				
H×W×D	mm	1080×660×770	1080×660×770	1140×660×865
TRANSPORT DATA				
Gross weight				
Cardboard packing	kg	240	250	300
Net weight	kg	230	235	275
Volume (packed)				
Cardboard packing	m ³	0,79	0,79	0,92
Cardboard packing H×W×D	mm	1250×750×850	1250×750×850	1300×750×950
WATER CONSUMPTION				
Cold and hot water per cycle*	l	40 + 6	48 + 12	63 + 15

+ = Available, Standard = Standard execution, * Tested in accordance of EN 604 56 norm
The data concerning dimensions of machines include all extended parts


FRONT FS 6 7 10

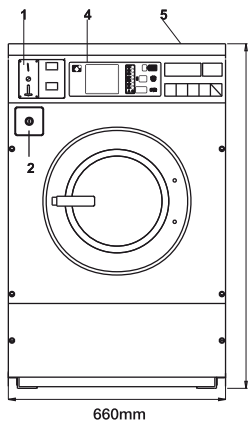

SIDE FS 6 7 10

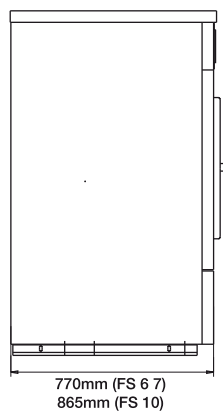

BACK FS 6 7 10

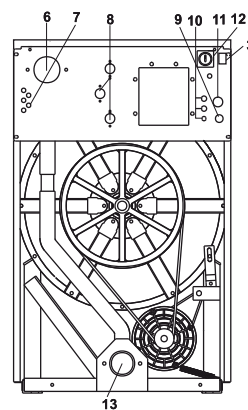

1. Coin meter
2. Coin box
3. Key switch
4. Keyboard
5. Soap hopper
6. Air vent
7. Liquid soap connection
8. Water connection
9. Electrical connection to liquid soap
10. Fuses
11. Electrical connection
12. Main switch
13. Drain valve

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

ISO 9001
ISO 14001
BUREAU VERITAS
Certification

