

P87/88



KNOW HOW in IRONING

Ghidini automatic presses are easily operated thanks to their pneumatic systems.

They feature new higher power pressing, fully adjustable, and a variety of bucks for specialist applications.

The wide opening bucks, facilitate both the pressing operation and the use of the steam iron.

Operation of the press head may be controlled by pedals (AP version), in order to leave the operator's hands free. In this case, to ensure operator safety, a safe-hands protection frame is fitted to the press head.

Alternatively, the head of the press may be controlled by two buttons (AB version), which have to be pushed simultaneously. The presses are available either completely self contained with built-in electric and automatic steam boiler, vacuum and compressor unit as required, or for central supplies operation.

The P 87 has a faster lowering action than P 88, and is particularly suitable for rapid service drycleaning shops, press centres and clothing industry.

Furthermore P87 is equipped with a shading device controlled by a lever that allows the press head to be lowered without pressing it on the lower buck: in this way it is possible to steam and vacuum the clothes without pressing them.

SPECIAL BUCKS FOR EVERY NEED



LAUNDRY PRESSES

Presses with upper polished board out of stainless steel AISI 304





U3L

Utility bucks with polished head for laundry

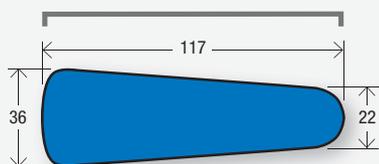


U4L

Oversize utility boards with polished head for laundry

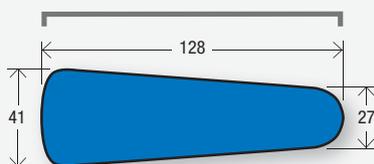


CP

Collar & cuffs boards with polished head

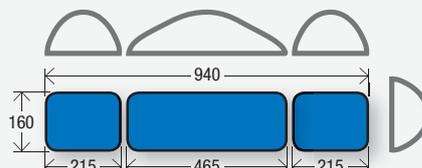



V1L

Mushrooms bucks with hot head




MM BB

Shirt boards with polished head for laundry




CC

Body Shirt boards with polished head for laundry



RT L

Special rectangular boards with polished head for laundry



AB

Lowering of the press head controlled by two push buttons



AP

Lowering of the press head controlled by one pedal, complete with safety frame




DRYCLEANING PRESSES

Presses with up-steaming lower and upper board




B

Boards with trouser-waistband shape




UGP

Combined utility legger bucks

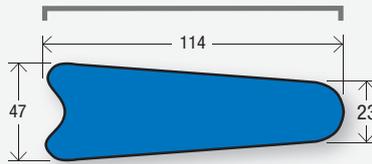


GP

Legger bucks

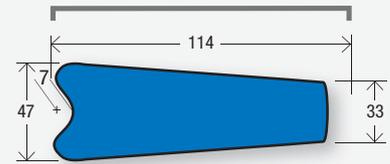


U3

Utility bucks

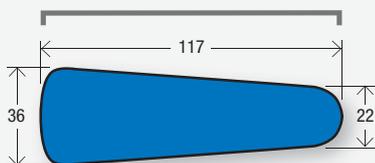


U4

Oversize utility boards

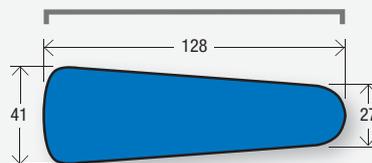


V1

Mushrooms bucks



SPECIFICATIONS and OPTIONS

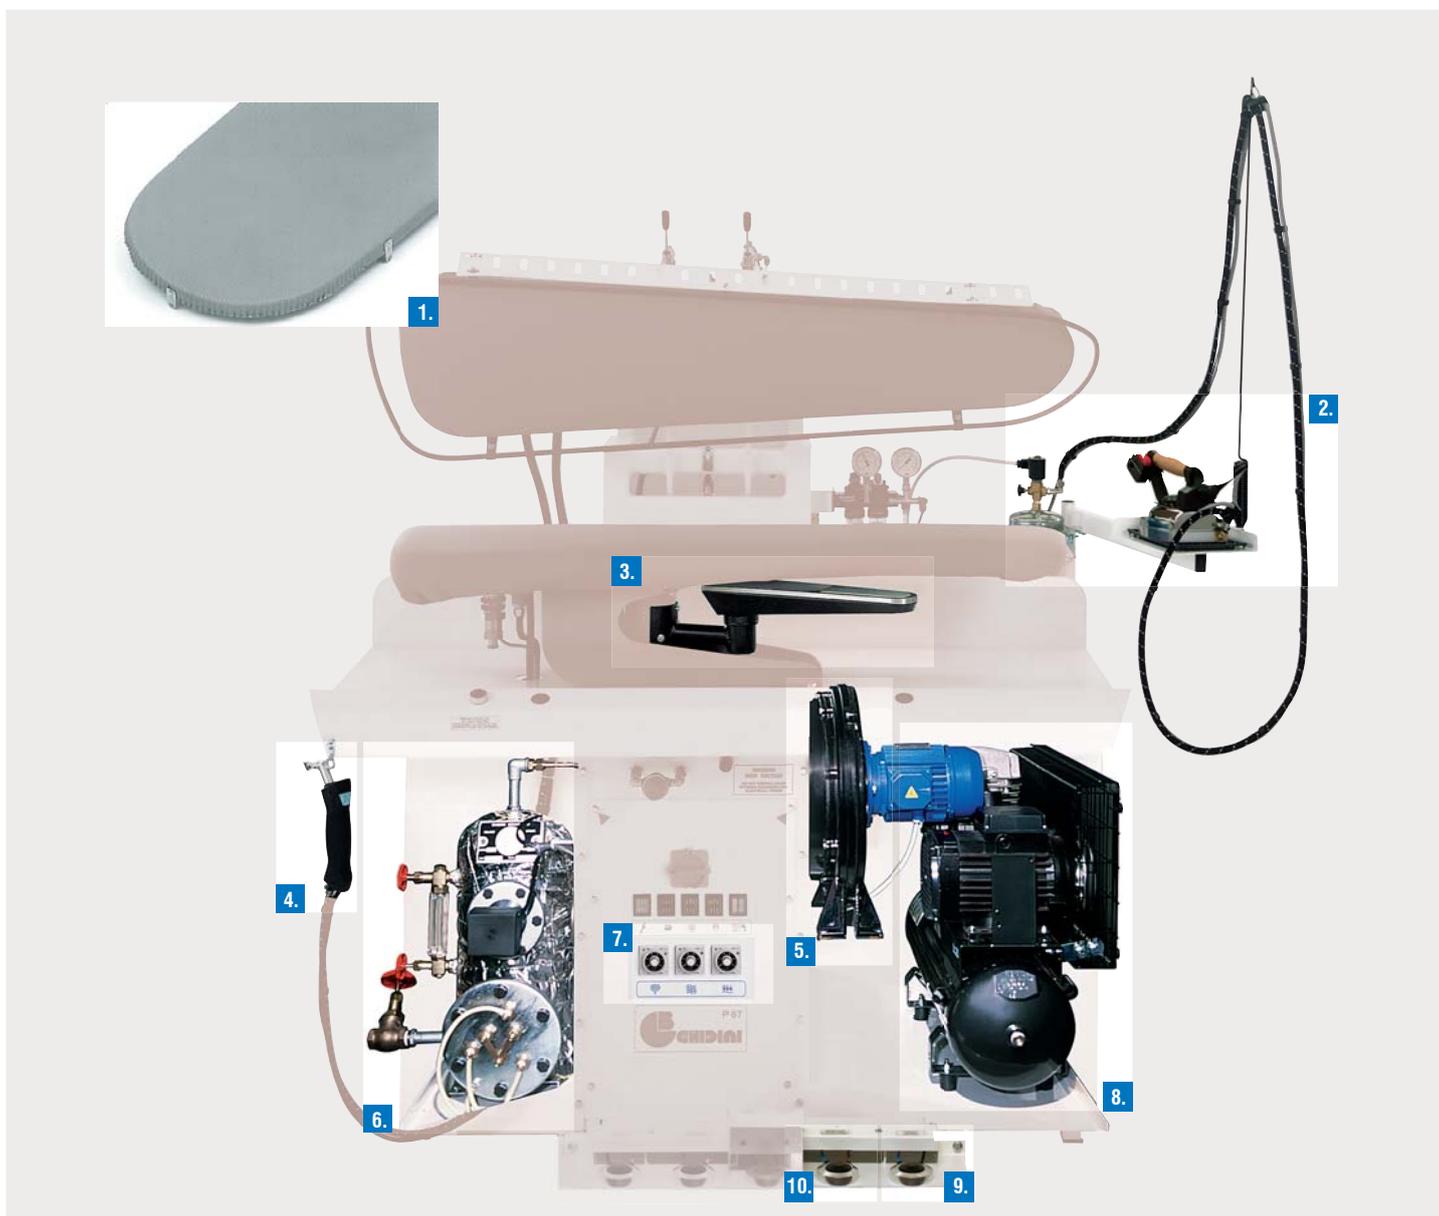

Technical Specifications	SELF CONTAINED	CENTRAL SUPPLY	Available options on request
Voltage	230V/400V/3/50-60 Hz	--	1. Upper antishine teflon plate
Steam inlet	--	1/2"	2. Complete steam iron assembly
Condense outlet	--	1/2"	3. Swinging arm with suction and spotting shape
Water feeding	3/8"	--	4. Steam-air spotting gun
Boiler drain	1/2"	--	5. Built-in vacuum unit
Air inlet	--	Ø 3/8"	6. Built-in steam boiler
Central vacuum connect.	--	Ø 90 mm	7. Automatic working cycle pre set by timers
Vacuum outlet	Ø 60 mm	--	8. Built-in compressor unit
Steam working pressure	4 ÷ 5 bar	4 ÷ 5 bar	9. Blowing device
Air working pressure	6 ÷ 7 bar	6 ÷ 7 bar	10. Additional vacuum pedal
Air consumption	40 l/min.	40 l/min.	
Steam consumption	12 ÷ 20 Kg/h	12 ÷ 20 Kg/h	
Pump motor	0,75 HP	--	
Vacuum motor	0,60 HP	0,60 HP	
Compressor motor	2,00 HP	2,00 HP	
Boiler heater	10-12-15-18 kW	--	
Overall dimensions	1370x1080x1250 mm	1370x1080x1250 mm	
Net weight	292 Kg	237 Kg	
Gross weight (carton-pallet)	342 Kg	287 Kg	
Packing dimensions	1440x1110x1410 mm	1440x1110x1410 mm	
Volume	2,71 m ³	2,71 m ³	

The firm reserves the right to make any necessary modification without notice.