

we care 

primus

laundry equipment

## Industrial Cylinder Heated Drying Ironers

I 35 , I 50



### FEATURES

- Large surface contact with linen over an angle of 300°
- Chrome-plated cylinder for a better thermal conduction
- Finger protection and emergency button for more safety
- Durable NOMEX ironing belts
- Automatic cooldown
- Easy to operate microprocessor: 20 pre-set ironing programmes
- Indication of ironing speed and temperature
- Reverse mode possible
- Frequency controlled motor
- Easy to remove lint filters
- Space saving installation against the wall is possible: front return
- Electric, gas or steam heating

### OPTIONS

- Coin operated version
- Foot pedal for easy start and stop operation



ROBUST DESIGN




HIGH OUTPUT



LOW ENERGY  
CONSUMPTION

TYPE		I 35-140	I 35-160	I 35-200	I 50-160	I 50-200	I 50-250	I 50-320
ROLLER DIAMETER	mm	350	350	350	500	500	500	500
USEFUL ROLLER LENGHT	mm	1400	1600	2000	1600	2000	2500	3200
HEATING								
Electric heating	kW	17	25	29	33	38	55	65
Gas heating	kW	26	30	30	30	36	52	66
Steam heating	kg/h	27	32	40	36	49	68	88
MOTOR								
Roller motor	kW	0,37	0,37	0,37	0,37	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	0,18/0,255	0,18/0,255	0,18/0,255	0,18/0,255	2x0,18/0,255	2x0,18/0,255
IRONING CAPACITY*								
Electrical & Gas heating	kg/h	50	60	65	65	80	95	120
Steam heating	kg/h	60	75	80	80	95	115	145
ROLLER SPEED	m/min.	1,5-8	1,5-8	1,5-8	1,5-8	1,5-8	1,5-8	1,5-8
ELECTRIC CONNECTION		3x208-240V 50/60Hz 3x380-415V+N 50/60Hz						
DIMENSIONS HxWxD	mm	1180x2150x875	1180x2350x875	1180x2750x 875	1232x2350x 992	1232x2750x 992	1232x3350x992	1232x3950x992
TRANSPORT DATA								
Gross weight	kg	730	840	900	1120	1350	1500	1850
Net weight	kg	580	670	700	920	1150	1290	1590
Volume (crate packed)	m <sup>3</sup>	3,44	3,74	4,34	4,24	4,97	6,00	7,03
Crate packing HxWxD	mm	1550x2290x 970	1550x2490x970	1550x2890x970	1550x2490x1100	1550x2890x1100	1550x3490x1100	1550x4090x1100

\* Tested in accordance of ISO 9398-2, The data concerning dimensions of machines include all extended parts

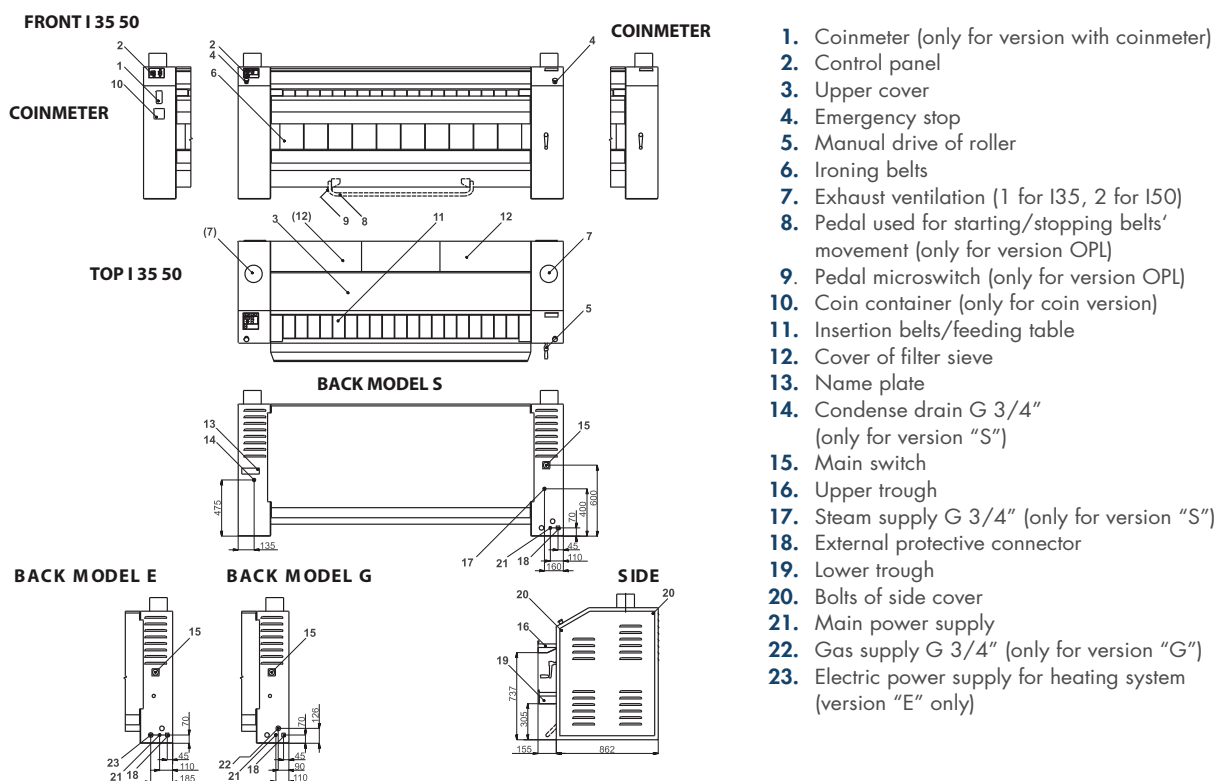

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)