

# Tumble dryer

## TD6-7 with heat pump



### Exceptional savings and effortless use



#### Priority on people

Certified ergonomic design with a human-centered approach for an outstanding user experience

- Lint filter  
The horizontal filter drawer is positioned for easy access and cleaning without the need to bend down when stacked on a WH6-6
- The display can easily be moved to the bottom of the tumble dryer for a better position when stacked



#### Long-term savings

Innovative features to save money and time, and embrace a sustainable lifestyle with up to 65% energy saving due to the heat pump technology

- Moisture Balance helps to stop the drying process at the right time to save on energy costs



#### Pure control

Monitor your equipment and performance from anywhere, allowing to take action and to improve your business with OnE Laundry - the personal assistant for hygiene validation management, process management and revenue management (optional)



#### Outstanding productivity

- Dry more laundry in less time: a game-changing improvement
- Reversing drum minimizes wrinkles and drying time to get an effective and even drying performance
- The tumble dryer can operate in an ambient temperature in between +10°C to +45°C

### Other options

- Insulated glass door keeps the door cool on the outside and heat on the inside, so the room temperature is not affected
- Lagoon Advanced Care
- Door, front and side panels are available in stainless steel
- Connectable to booking-/payment system or coin meter



*Images shown are a representation of the product only and variations may occur.*

Main specifications		TD6-7
Rated capacity, filling factor 1:18	kg / lb	7.5 / 16.5
Rated capacity, filling factor 1:22	kg / lb	6.1 / 13.4
Drum, volume	litre	135
Drum, diameter	ø mm	575
Rated input	kW	2.3
Consumption data <sup>1</sup>		
Total time	Min	42
Energy consumption	kWh	1.28
Evaporation	g/min	73
Energy water evaporation	kWh/l	0.42

<sup>1</sup>. At rated capacity 1:22, 100% cotton load at 50% initial moisture dried to 0%.

Produced according to ISO 9001 and ISO 14001.




Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.

Electrical connections					
Machines with heat pump	220-240V 1/1N 3~	50/60	<sup>1</sup>	2.3	10
	380-415V 3N~	50/60	<sup>1</sup>	2.3	10

1. Total power and recommended fuse does not depend on the heating power in those cases.

Sound levels		TD6-7
Sound power/pressure level at drying <sup>1</sup>	dB(A)	63/48
Heat emission		
Average heat emission per drying cycle used to assess ventilation need <sup>2</sup>	kW	0.7
Shipping data <sup>3</sup>		
Weight	net, kg	131
Shipping volume	m <sup>3</sup>	0.81
1. Operating panel	3. Electric connection	
2. Door opening, ø 392 mm	4. Drain (condensed water)	

1. Sound power levels measured according to ISO 60704.  
 2. For assistance with dimensioning necessary ventilation needs, contact authorized ventilation technician. For sufficient ventilation all sources introducing heat need to be taken into account plus all other parameters effecting the ventilation need. Climate zone, building parameters, room size, etc.  
 3. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.  
 Silver grey and dark blue color samples can be ordered on part number 472998313.

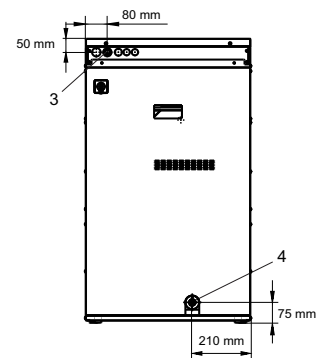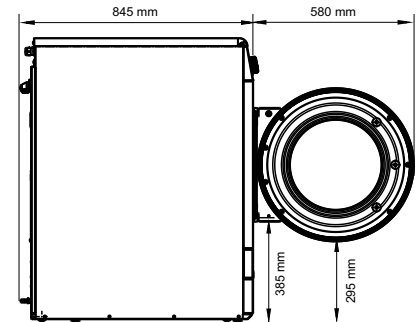

Experience the Excellence  
[professional.electrolux.com](https://professional.electrolux.com)

438913953EN/2024.02.14  
 We reserve the right to alter specifications without notice